


Horizontal Flash Tank

Designed for flashing of high pressure condensate into steam and low pressure heating supply mains. Orientation of horizontal design allows for surface flashing. These also reduce steam pressure prior to returning to either condensate tanks, boilers, or discharge into sewer mains.

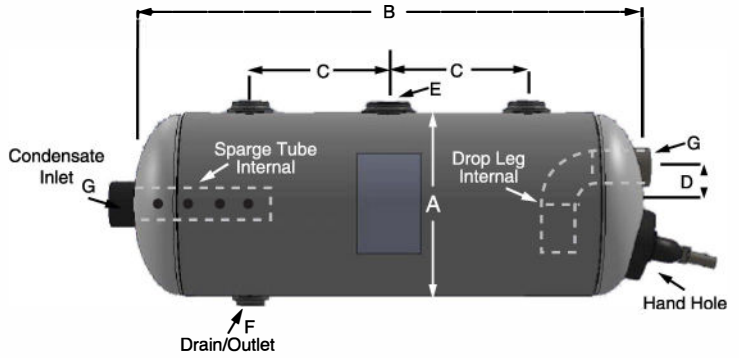

Features:

- Constructed in accordance with ASME Section VIII, Division I, Latest Edition
- Carbon Steel Construction
- Working Pressure 150 PSI
- Maximum Temperature 450° F
- Drop Leg
- Sparge Tube
- Red Oxide Primer

Optional Features:

- Exterior Coatings

All packaging materials, thread protectors, plastic plugs and caps must be removed before installation. Dimensions are subject to change without notice, please confirm actual dimensions with factory at time of order.

PART NUMBER	TANK VOLUME (ACTUAL)	DIA A(IN.)	LENGTH B(IN.)	DIM. C(IN.)	DIM D(IN.)	NPT OPENINGS			WEIGHT	WORKING PRESSURE
						E(IN.)	F(IN.)	G (IN.)		
FT-013-HRZ	13 GALLONS	10	39	13	2 1/2	2	1	1 1/2	65	150 PSI
FT-015-HRZ	15 GALLONS	12	33	9	2 1/2	2	1	1 1/2	70	150 PSI
FT-018-HRZ	18 GALLONS	12	39	12	3	2	1	1 1/2	75	150 PSI
FT-024-HRZ	24 GALLONS	14	39	12	3-1/2	2	1	1 1/2	80	150 PSI
FT-030-HRZ	30 GALLONS	16	38	11	4	2 1/2	1 1/2	1 1/2	85	150 PSI
FT-048-HRZ	48 GALLONS	18	48	15	4 1/2	2 1/2	1 1/2	1 1/2	115	150 PSI
FT-080-HRZ	80 GALLONS	24	48	14	6	3	2	2	150	150 PSI
FT-125-HRZ	125 GALLONS	30	48	12	7 1/2	3	2	2	255	150 PSI

JOB NAME _____
 LOCATION _____

 CONTRACTOR _____
 CONTRACTOR P.O. NO. _____

ITEMS	QUANTITY
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____

American WHEATLEY
HVAC PRODUCTS®
A GFP COMPANY

2701 W. Concord Street
 Broken Arrow, OK 74012
 Toll Free: 866-204-5229
 PH: 918-317-0401
 FAX: 918-317-0407
 www.wheatleyhvac.com
 e-mail: sales@globalflowproducts.com