

Air Receiver / Vertical-Small Chilled Water Storage Tanks


Designed for the storage of compressed air/chill water storage.

Features:

- Constructed in accordance with ASME Section VIII, Division I, Latest Edition
- Carbon Steel Construction
- See table for working pressures
- Maximum Temperature 650°F
- Red Oxide Primed Exterior

Optional Features:

- Relief Valves
- Pressure Gauges
- Manual or automatic underdrains
- Larger sizes available upon request

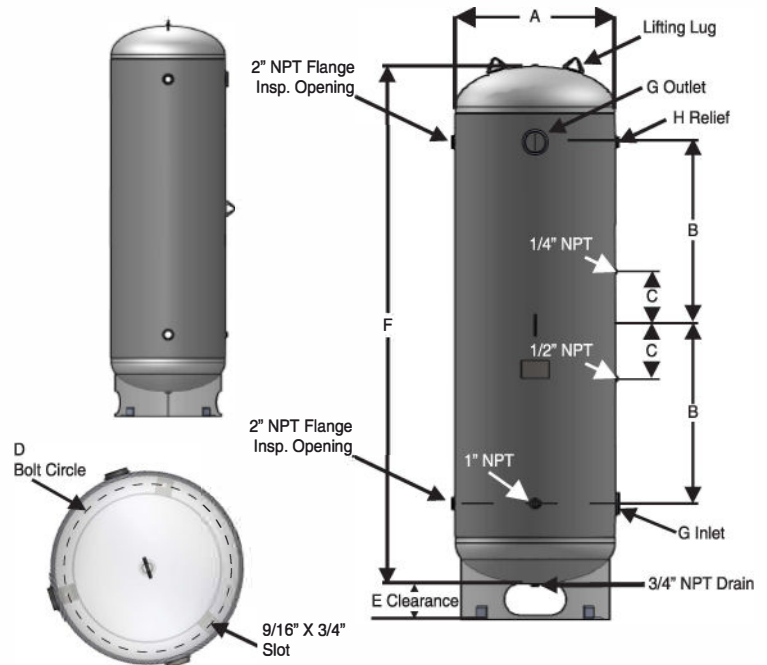

PART NUMBER	ACCEPTANCE VOLUME (GAL)	CUBIC FEET	DIAMETER OD (IN.)	LENGTH TL (IN.)	HEIGHT HT (IN.)	WORKING PRESSURE	WEIGHT (LBS)
IAR-120	120	16.0	24	68	76 1/16	200	308
IAR-200	200	26.7	30	72	80	200	526
IAR-240	240	32.2	30	84	92	200	612
IAR-400	400	53.4	36	93	101	137	753
IAR-400-X	400	53.4	36	93	101	137	913

PART NUMBER	ACCEPTANCE VOLUME (GAL)	A (IN.)	B (IN.)	C (IN.)	D (IN.)	E (IN.)	F (IN.)	G (IN.)
IAR-120	120	7	22	8 1/16	21	1/2	1 1/2	2
IAR-200	200	8	23	8	28 3/4	1/2	1 1/2	3
IAR-240	240	10	29	8	28 3/4	1/2	1 1/2	3
IAR-400	400	11	32	8	31	1/2	1 1/2	3
IAR-400-X	400	11	32	8	31	1/2	1 1/2	3

All packaging materials, thread protectors, plastic plugs and caps must be removed before installation. Dimensions are subject to change without notice, please confirm actual dimensions with factory at time of order.

JOB NAME _____
LOCATION _____
CONTRACTOR _____
CONTRACTOR P.O. NO. _____

ITEMS	QUANTITY
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____



2701 W. Concord Street
 Broken Arrow, OK 74012
 Toll Free: 866-204-5229
 PH: 918-317-0401
 FAX: 918-317-0407
 www.wheatleyhvac.com
 e-mail: sales@globalflowproducts.com