



Large Series Glass Lined-Foam Insulated Storage Tank

Features:

- Constructed in accordance with ASME Sec IV, HLW
- Interior is Ultonium Glass Lined
- Exterior has sprayed on rigid insulation, R-16 Topcoat insulation, 2 1/4" thick, compliant with California Title 24 requirements
- Class I foam, 2 coats of polyurethane foam are applied in separate methods for improved insulation
- Suitable for indoor and outdoor applications
- Saddle Supports included
- Design and Test Pressure 125 P.S.I.

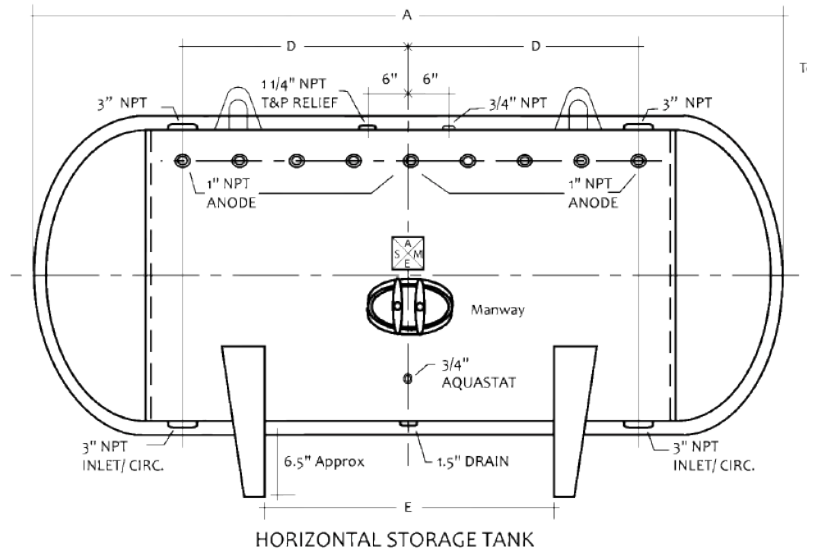

Bill of Materials

DESCRIPTION	MATERIAL
Heads	Carbon Steel
Shell	Carbon Steel
Couplings	Carbon Steel
Flanges	N/A
Pipe	N/A
Manway	Carbon Steel

PART NUMBER	CAPACITY VOLUME GALLONS	TOTAL LGT A (IN.)	TOTAL HGT B (IN.)	DIAM C (IN.)	CIRCU. D (IN.)	SADDLE LENGTH E (IN.)	SADDLE WIDTH F (IN.)
BH-84-210-TC	4,610	215"	95 1/4"	89"	77"	127 1/2"	73"
BH-84-256-TC	5,695	261"	95 1/4"	89"	100"	173 1/2"	73"

Note: Overall height length and diameter may vary due to variations in topcoat thickness.

All packaging materials, thread protectors, plastic plugs and caps must be removed before installation.

Dimensions are subject to change without notice, please confirm actual dimensions with factory at time of order.

JOB NAME _____
 LOCATION _____

 CONTRACTOR _____
 CONTRACTOR P.O. NO. _____

ITEMS	QUANTITY
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____

American WHEATLEY
HVAC PRODUCTS®
A GFP COMPANY

2701 W. Concord Street
 Broken Arrow, OK 74012
 Toll Free: 866-204-5229
 PH: 918-317-0401
 FAX: 918-317-0407
 www.wheatleyhvac.com
 e-mail: sales@globalflowproducts.com