


Fabricated T-Type Strainer

Model TSF

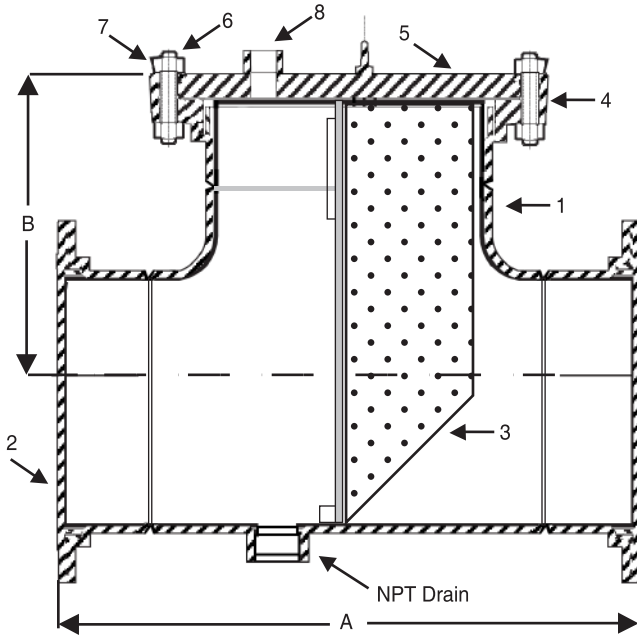

Dimensional Data (In Inches)

Model	Size	A	B	VENT	DRAIN	Weight Total (lbs)
TS0400F	4"	14 1/4	8 1/8	1/2	3/4	94
TS0500F	5"	16 3/4	9 3/8	1/2	1	110
TS0600F	6"	18 1/4	10 1/8	1/2	2	140
TS0800F	8"	22	12 1/8	1/2	2	238
TS1000F	10"	25	13 3/4	1/2	2	401
TS1200F	12"	29	15 3/4	1/2	2	525
TS1400F	14"	32	17 3/8	1/2	2	731
TS1600F	16"	34	18 1/2	1/2	2	954
TS1800F	18"	38	20 5/8	1/2	2	1135
TS2200F	20"	41 3/8	22 3/8	1/2	2	1470
TS2240F	24"	46	24 7/8	1/2	2	2311
TS3000F	30"	52	27 7/8	1/2	2	1925

Operating Pressure & Temperature

Nom. Rating	4" to 30"
150#	285 PSI @ 100°F

Optional Features:

- Stainless Steel Construction
- Pressures ANSI 300 to 2500
- Screen Materials available in various perforation sizes and materials of construction and configurations
- Painted Exterior, Epoxy Coatings

Bill of Materials

Item	Part Name	Material
1	Body	Carbon Steel Pipe (ASTM A 234) Class WPB
2*	150lb RFWN Flange	Carbon Steel (ASTM A 105)
3	Basket	Stainless Steel (304) 1/8" perf
4	Gasket	Fiber
5	150lb Blind Flange (Cover)	Carbon Steel (ASTM A 105)
6	Studs	Carbon Steel (ASTM A 193, Grade B7)
7	Nuts	Carbon Steel (ASTM A 194, Grade 2H)
8	Coupling NPT (Vent)	Carbon Steel (ASTM A 105)

*30" & Larger Flanges are RFWN Series B

Dimensions are subject to change without notice, please confirm actual dimensions with factory at time of order.

JOB NAME _____
 LOCATION _____

 CONTRACTOR _____
 CONTRACTOR P.O. NO. _____

ITEMS	QUANTITY
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____

American WHEATLEY
HVAC PRODUCTS®
 A GFP COMPANY
 1005 E. Houston
 Broken Arrow, OK 74012
 Toll Free: 866-204-5229
 PH: 918-317-0401
 FAX: 918-317-0407
 www.wheatleyhvac.com
 e-mail: sales@globalflowproducts.com