




Y-TYPE THREADED STRAINERS- STAINLESS

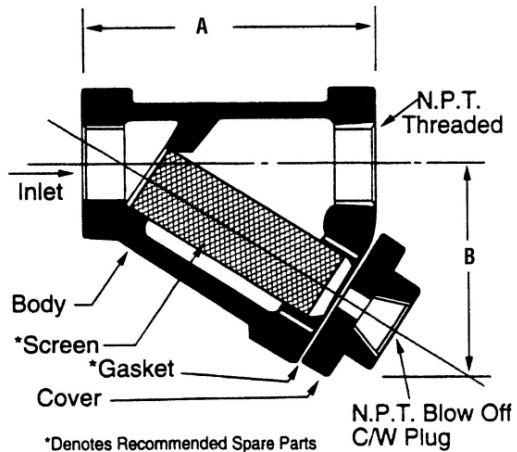

Dimensional Data

MODEL NO	SIZE (IN)	A	B	BLOWOFF NPT	WEIGHT (LBS)
CTY0050-SS	1/2	3 1/4	2 1/2	1/4	4
CTY0075-SS	3/4	3 3/4	2 3/4	1/4	5
CTY0100-SS	1	4 1/4	3 3/16	1/2	6
CTY0125-SS	1 1/4	5 1/4	3 7/8	1/2	8
CTY1050-SS	1 1/2	6 1/4	4 3/4	1/2	10
CTY0200-SS	2	7 5/8	6	3/4	18
CTY0250-SS	2 1/2	8 3/8	7	1 1/4	25
CTY0300-SS	3	9 1/2	8 1/2	1 1/4	30

Catalog weights & dimensions are approximate. Apply for certified dimensions from the factory.

Operating Pressure + Temperature

Steam	600 PSI @ 486°F
Liquid	1440 PSI @ 100°F

Bill of Materials

ITEM	PART NAME	MATERIAL
1	Screen	Stainless Steel
2	Body	ASTM SPEC A351 CF8M

Standard Screens

SERVICE	SIZES	SCREEN OPENINGS	SCREEN MATERIAL
Steam & Liquid	1 1/4" thru 3"	20 mesh .032 perf.	Stainless Steel

Dimensions are subject to change without notice, please confirm actual dimensions with factory at time of order.



2701 W. Concord Street
Broken Arrow, Ok 74012
Toll Free: 866-204-5229 | PH: 918-317-0401
americanwheatley.com | sales@americanwheatley.com

